

HIOKI

LUX METER FT3424, FT3425

High reliability LUX METER series

Complies with **DIN Class B** and **JIS Class AA**

Compatible with **LED/OLED** lighting



**Bluetooth® wireless technology
saves time and money**

Built-in Bluetooth® wireless technology
FT3425

From measurement to report creation
Cut work time in half



Ideal for low-illuminance measurement

Support for measurement of 1 lx


20 lx range measurement resolution **0.01 lx**



Large, easy-to-see LCD display

The backlight turns on automatically whenever a measured value is retained in a low-illuminance environment.

Measure with sensor and display units undocked



Sensor unit and main display can be separated to 2m, letting you measure at a distance away from the sensor in order to accommodate for difficult locations, shadows, and other issues.



CONNECTION CABLE
L9820 (Option)

Timer hold function

Retain the measured value after a user-selected amount of time has elapsed from the time the TIMER key is pressed. In this way, you can time measurement to occur after you have moved away from the lux meter so that measurement is not affected by clothing, shadows, etc.

Timer settings


Select from 5 / 10 / 15 / 20 / 30 / 45 / 60 sec.

Remaining time display

Counts down with timer.

After the set time has elapsed

The measured value is retained. → The backlight turns on and the beep sounds for 3 sec.

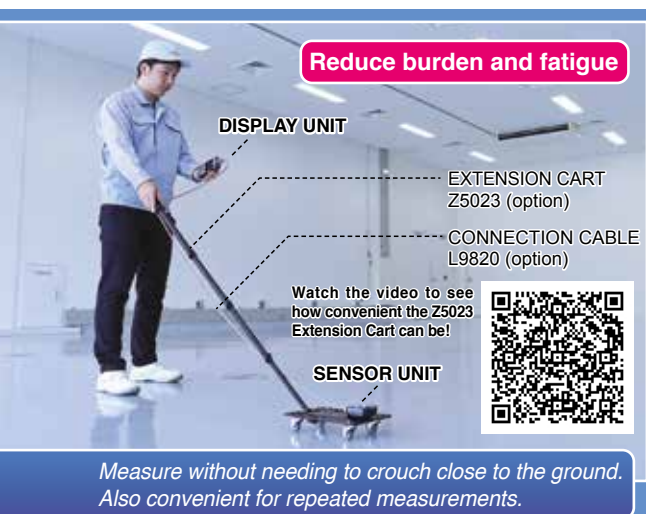

Reduce burden and fatigue

DISPLAY UNIT

EXTENSION CART
Z5023 (option)

CONNECTION CABLE
L9820 (option)

Watch the video to see
how convenient the Z5023
Extension Cart can be!

SENSOR UNIT

Measure without needing to crouch close to the ground.
Also convenient for repeated measurements.

Recommended
points

Reduce your physical burden

EXTENSION CART Z5023 (option)

Hioki offers an auxiliary cart equipped with caster wheels so that it can be easily moved between measurement locations. The cart makes the measurement process significantly less physically demanding by eliminating the need to squat down to position the instrument or read its display. When using the FT3425 with a smartphone or tablet, there's no need for a connection cable (see photograph on the first page of this catalog).

Key Features

Memory function makes multipoint measurement a breeze

Memory function (up to 99 values)

Save measured values for multiple measurement locations in the instrument's internal memory on the spot for later display at your convenience.

Data communications functionality

Transfer data saved in the instrument's internal memory to a computer via a USB connection. Data can be saved as a text file.

Other software functionalities


- Display graphs and save files for user-specified time intervals. (Data can also be saved manually.)
- Display measured values on a computer screen in real time.



USB
connection

Record variations in illuminance with D/A output.

Output cord must be modified to suit the connected device. (Use a commercially available USB power adapter to supply power for extended periods of time.)



Output voltage
2 V/ range f.s.


Hioki Voltage Logger LR5042

Cut work time in half!

FT3425 Built-in Bluetooth® wireless technology

Shorter work times

No more errors

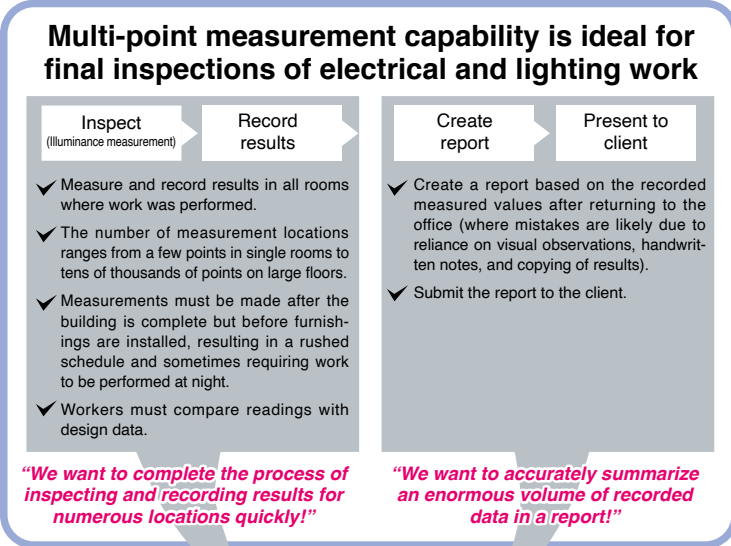

Free smartphone app
GENNECT Cross

Built-in Bluetooth® wireless technology
Solution: FT3425 Lux Meter
Simplify inspection, recording, report creation and submission with GENNECT Cross. (Free smartphone app)






Snap pictures of drawings and CAD data. (image files).



Tap the drawing on the screen to assign measured values to the desired points and record them.

Measured illuminance data is automatically sent to your smartphone or tablet, and you can assign measured values to particular locations on drawings shown on the phone's display.

Easily create reports, output data as a CSV file, and send by email.

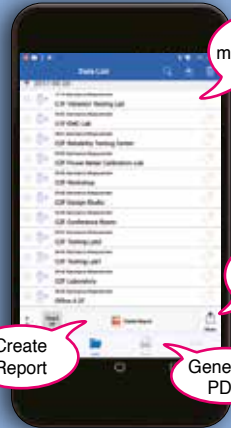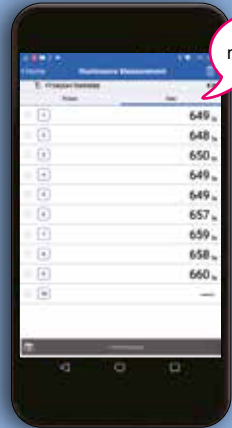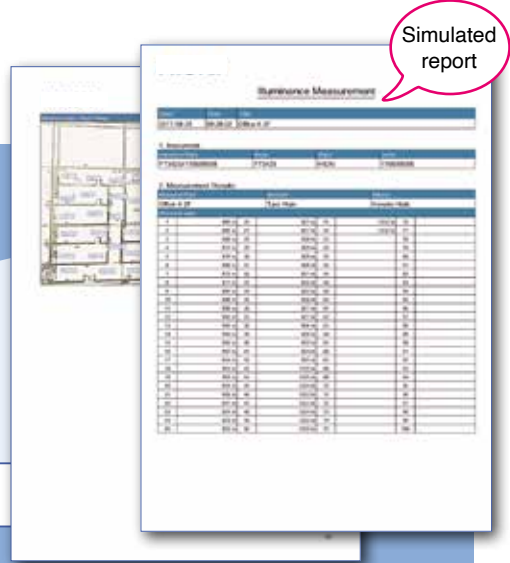

Create Report

Send Email

Generate PDF

Significantly shorten work times by preventing mistakes that can occur during the inspection process, for example when visually observing measured values, jotting down handwritten memos, and entering data!

FT3424, FT3425 Specifications (Accuracy guaranteed for 2 years)

Only FT3425 is equipped with Bluetooth® wireless technology, others are shared specifications

| | | | |
|---|---|---|----------------|
| Classification | DIN 5032-7: 1985 class B JIS C 1609-1: 2006 general AA class | | |
| Light receiving element | Silicon photo-diode | | |
| Display | Display: 4 digit, 2000 count LCD Display unit: lx (lux) Display update rate: 500 ms ±20 ms | | |
| Measurement ranges | Range | Measurement range | Display step |
| | 20 lx | 0.00 lx to 20.00 lx | 1 count/step |
| | 200 lx | 0.0 lx to 200.0 lx | |
| | 2000 lx | 0 lx to 2000 lx | 10 counts/step |
| | 20000 lx | 00 lx to 20000 lx | |
| 200000 lx | 000 lx to 200000 lx | 100 counts/step | |
| Range selection | Auto/Manual | | |
| Linearity | ±2% rdg. (Multiply by 1.5 for display values in excess of 3000 lx.) | | |
| Accuracy guarantee conditions | Sensor unit and display unit must bear the same identification number. | | |
| Accuracy guarantee for temperature and humidity | 21°C to 27°C (69.8°F to 80.6°F), 75% RH or less (non-condensing) | | |
| Characteristics | [Temperature characteristics] ±3% rdg. [Humidity characteristics] ±3% rdg. | | |
| Response time | Auto range: within 5 seconds, Manual range: within 2 seconds | | |
| Output specifications | Output method | : D/A output | |
| | Output level | : 2 V/range f.s. | |
| | Resolution | : 1 mV | |
| | Output update rate | : 500 ms ±20 ms | |
| | Output resistance | : 1.1 kΩ or less | |
| | Output accuracy | : ±1% rdg. ±5 mV(at output rate) | |
| Power supply | AA/LR6 alkaline battery ×2, R6 Manganese battery ×2, USB bus power 5 V DC | | |
| | Continuous battery operation time | Approx. 300 hours (when using AA alkaline batteries, no Bluetooth® wireless technology) Approx. 80 hours (when using AA alkaline batteries, with Bluetooth® wireless technology) | |
| Auto-power off | Turns off the instrument 10 min. ±1 min. after the last key operation (can be canceled). | | |
| Operating temperature and humidity | -10°C to 40°C (14°F to 104°F), 80% RH or less (non-condensing) | | |
| Storage temperature and humidity | -20°C to 50°C (-4°F to 122°F), 80% RH or less (non-condensing) | | |
| Operating environment | Indoors, pollution degree 2, altitude up to 2000 m (6562 ft.) | | |
| Applicable standards | Safety: EN61010, EMC: EN61326 | | |
| Standard compliance | DIN 5032-7: 1985 class B, JIS C 1609-1: 2006 general AA class | | |
| Dust proof and waterproof | IP40 (EN60529) | | |
| Dimensions and mass (including the batteries) | Approx. 78W × 170H × 39D mm (3.07" W × 6.69" H × 1.54" D) | | |
| | Approx. 310 g (10.9 oz.) (FT3424)/320 g (11.3 oz.) (FT3425) | | |
| Accessories | Instruction Manual ×1, AA/LR6 alkaline battery ×2, Sensor cap (with strap) ×1, Carrying case (only the main unit can be stored) ×1, Strap ×1, USB cable (0.9 m) ×1, CD-R (USB driver, dedicated computer application software, and communications specifications) ×1, Precautions Concerning Use of Equipment that Emits Radio Waves ×1 (FT3425 only) | | |
| Interfaces | USB2.0 (FT3424/FT3425), Bluetooth® 4.0LE (only FT3425) | | |
| | Bluetooth® communication software | GENNECT Cross | |
| | Supported OS | iOS 10 or later (Only for Bluetooth® low energy models) | |
| Supported Android devices | Android 4.3 or later (Only for Bluetooth® low energy models) | | |


Model : LUX METER FT3424, FT3425

Model No. (Order Code) (Note)

FT3424

FT3425 Built-in Bluetooth® wireless technology

Options



EXTENSION CART Z5023

This cart with caster wheels can be easily moved between measurement locations. Use with the Connection Cable L9820 to check instrument readings from a standing posture. (The FT3425 can be paired with a smartphone, eliminating the need for a connection cable.)
Extension pole length: Approx. 0.5 m to 1.6 m



Connection Cable L9820

Use when positioning the sensor unit and display unit separately during use. (length: 2 m)



Carrying case C0202 (Soft case)

Handy for storing the instrument with the Output Cord L9094, USB cable, and Connection Cable L9820.
145W x 210H x 70D mm
(5.7" W x 8.27" H x 2.76" D)



Carrying case C0201 (Semi-hard case)

Stores the Output Cord L9094 and a USB cable.
137W x 193H x 69D mm
(5.4" W x 7.60" H x 2.72" D)

Output Cord

L9094
Mini plug to banana
1.5 m(4.92 ft) length

L9095
Connect to BNC terminal
1.5 m(4.92 ft) length

L9096
Connect to terminal block
1.5 m(4.92 ft) length

*The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by HIOKI E.E. CORPORATION is under license.
Note: Company names and product names appearing in this brochure are trademarks or registered trademarks of various companies.

HIOKI

HIOKI E. E. CORPORATION

HEADQUARTERS

81 Koizumi,
Ueda, Nagano 386-1192 Japan
<https://www.hioki.com/>



Scan for all regional contact information

DISTRIBUTED BY

asita
TECNOLOGIE DI MISURA




CONTATTI E NUMERI UTILI

ASITA SRL


Via Malpighi 170
48018 Faenza (RA)
Asita è anche Centro di Taratura ACCREDIA LAT n°109

Tel. 0546 620559
E-mail. asita@asita.com
<https://www.asita.com/>

Relative Spectral Response Characteristics in the Visible Spectrum

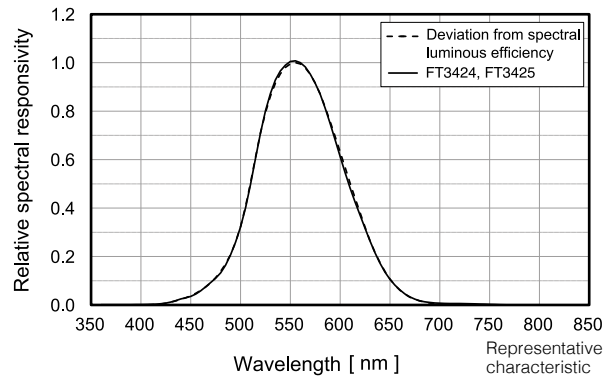

Angled Incident Light Characteristics

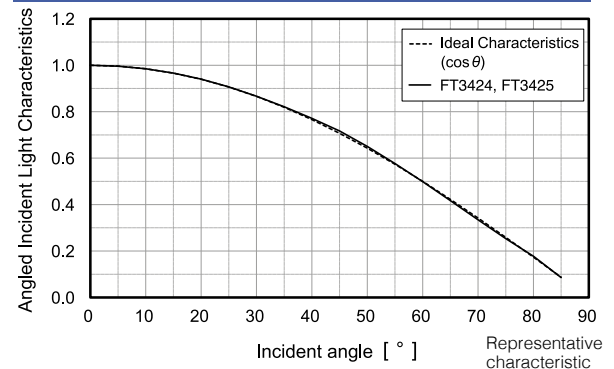

Oblique incident light characteristics

| Angle | Deviation from cosine characteristics |
|-------|---------------------------------------|
| 30° | ±2 % |
| 60° | ±7 % |
| 80° | ±25 % |

Graph illustrates typical characteristics.
Characteristics exhibited by individual products may vary slightly.

Data can be downloaded to tablets and smartphones using Hioki's dedicated apps available from the Google Play or App Store. (FT3425 only)
Search for "HIOKI" and download the "GENNECT Cross" app.



*Android, Google Play and the Google Play logo are trademarks of Google Inc.
*iOS is a registered trademark of Cisco Technology, Inc. and/or its affiliates in the United States and certain other countries.
*iPhone, iPad, iPad mini, iPad Pro and iPod touch are trademarks of Apple Inc.
*Apple and the Apple logo are trademarks of Apple Inc. App Store is a service mark of Apple Inc.
*Microsoft, Windows, Windows Vista, and Excel are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.
*Company names and Product names appearing in this brochure are trademarks or registered trademarks of various companies.
*The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by HIOKI E.E. CORPORATION is under license.
*For the latest information about countries and regions where wireless operation is currently supported, please visit the Hioki website.